

StarBoard FX-77E2/FX-79E2

INTERACTIVE WHITEBOARD



Affordable interactive technology for your classroom environment.

StarBoard FX-77E2/FX-79E2 series interactive whiteboards bring finger-driven interactivity to your classroom or conference room. These models combine simplicity of design and solid surface with the latest interactive technology. Their finger-driven features and multi-touch gesture capabilities make StarBoard FX-77E2/FX-79E2 intuitive for anyone to use. The large surface of these boards provides an additional working space and contributes to comfortable group work.

Finger-Driven Technology



Use your finger, stylus pen or any object to easily navigate through activities, websites and multimedia content.

Multi-Touch Features



Control the whiteboard naturally with the multi-touch gestures - use your finger to annotate, fist to scroll and two fingers to erase or zoom in and out.

"10-Touch" Feature




Thanks to the "10-Touch" feature, up to ten users can write and work on the whole surface of the board simultaneously.

Quick Access to Frequently Used Tools



The function buttons situated on each side of the board allow quick access to the most frequently used tools.

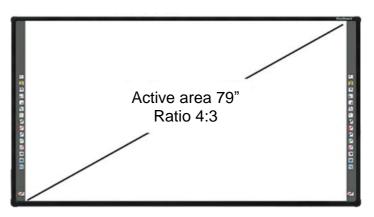

15 function buttons on either side

Accessories



Software key features

- Support of different OS: Windows, Mac
- Customisable floating toolbar
- Hand writing recognition
- Variety of digital inks
- Export notes in various file formats
- Direct access to the Internet, Google image search
- Import Microsoft Office files
- Supports IWB Common File Format (CFF) for easy sharing of educational content
- Remote conferencing feature included

Packing size (mm)

FX-79E2: 1.975 (W) x 1,405 (H) x 90 (D)

Hardware key features

- · Use a finger or any object to operate the whiteboard
- Large interactive area
- Up to ten simultaneous inputs for collaborative work
- Multi-touch features for intuitive use
- 15 function buttons for easy access to the frequently used tools
- Light weight with a magnetic steel surface
- Improved bracket design makes the board easy to mount
- Improved surface of the board
- Inscribable with IWB pen markers

Specifications FX-77F2/79F2

	,
Model No.	Operating Specification
FX-77E2	+5- +35°C, 20-80% humidity without

FX-77E2 FX-79E2

condensation Dimensions (mm)

Input Methods Infrared ray shading detection system

Interface to Computer USB 1.1. USB 2.0

Effective Screen Size (mm) FX-77E2: 1,742 (W) x 1,180 (H) FX-79E2: 1,633 (W) x 1,225 (H)

Board/Surface Material

High density polyester (core), steel (surface)

Warranty

5 year limited equipment warranty

Weight Net

FX-77E2: 1.805 (W) x 1.234 (H) x 35 (D) FX-77E2: approx. 20 kg FX-79E2: 1,852 (W) x 1,281 (H) x 35 (D FX-79E2: approx. 22 kg

Weight Gross FX-77E2: 1,925 (W) x 1,360 (H) x 90 (D)

FX-77E2: approx. 28 kg FX-79E2: approx. 30 kg

Certificates

FCC Class B, CE, VCCI Class A

System Requirements

CPU: Intel Pentium 41.8 GHz or higher RAM: 1GB or more HDD: 600MB or more

Display Color Depth: 32bits or more

Operating Systems

Windows OS:

Windows 7, Windows 8.1/10 (latest service pack recommended) (Tablet PC Edition and Server Edition are not supported)

10.10 (Yosemite), 10.11 (El Capitan), 10.12 (Sierra)

Restrictions possible. Please contact us.

Please read safety instructions in User's Guide before using this product. Specifications and images are subject to change without notice.

StarBoard Solution GmbH

Am Borsigturm 53 D-13507 Berlin, Germany Tel: +49 (0)30 8877 2600

Email: berlin@starboard-solution.com

www.starboard-solution.eu

FC CE 🚯



